



**NEW** **XA12** 

**ALIGNMENT SCISSOR LIFT**

**12,000 lbs. CAPACITIES**

**Bay saver alignment scissor lifts designed for small bays**



  
XA12N000

**VERSATILITY IS THE STANDARD TO WHICH ROTARY LIFTS ARE BUILT.**

The XA12 is the perfect small bay solution with the largest 4-wheel alignment wheelbase range available in its class size.



  
XA12N000

# NEW XA12



ALIGNMENT SCISSOR LIFT  
12,000 lbs. CAPACITY




## XA12 BAY SAVER ALIGNMENT SCISSOR LIFT

Bay saving lift design with the largest 4-wheel alignment wheelbase range available in its class size. With a 78" to 164" 4-wheel wheelbase range, and 12,000 lbs. lifting capacity, service cars, trucks, and anything in between.

## BIG CAPACITY. SMALL FOOTPRINT.

MINIMUM BAY SIZE: 12' X 23'

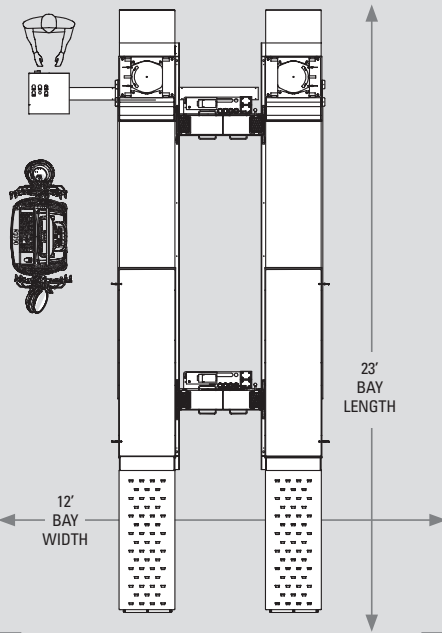

The XA12 is the perfect small bay solution.

Perform alignments with workspace to spare!

Surface mounted XA12 measures 7' 5 1/2" wide and 22' 3" long easily fitting within the smallest of service bays.

Contact a Rotary factory representative for details on optional customized installation options.



## PRODUCTIVITY and PERFORMANCE FEATURES

### 1 OPEN THROUGH ACCESS

Open front and rear design provides greater unobstructed technician access to the vehicle adjustment points so wheel alignments, and other repairs are easily performed.




\* SURFACE MOUNT MEASUREMENT

### 2 73 5/8" of Vertical Rise\*

Technicians have the height to get repair work done. True up/down movement minimizes needed bay space.

### 2 ADJUSTABLE RADIUS GAUGES

Quickly and easily configure for short and long wheelbases to accommodate a greater wheelbase range.



Exclusive, adjustable front-to-rear radius gauge with runway spacers provide the ultimate in vehicle flexibility.

XA12 lifts come standard with two (2) stainless-steel radius gauges

### 3 AIR OPERATED ROLLING JACKS



Standard with two (2) 6,000 lbs. capacity rolling jacks with internal airlines.

### 4 OVERSIZED REAR SLIP PLATES

Longer rear slip plates are designed to accommodate a greater wheelbase range.

### 5 OPTIONAL LED RUNWAY LIGHTING SYSTEM

Positioned on the inner side of the runways, the lighting system illuminates the under vehicle workspace.




  
XA12N000

6

### HINGED RAMPS WITH CHOCKS

Ramps automatically self-chock and drop down when lift is raised on surface installed models. Ramps are lowered for better traction control when driven on and off.

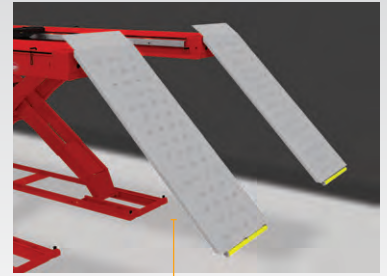

### OPTIONAL EXTENDED RAMP KIT

Longer ramps allow easier, safer loading of low profile vehicles.

**201" RUNWAY LENGTH**  
SERVICE A GREATER RANGE OF VEHICLES

5

4

6

### 24 1/2" WIDE RUNWAYS

Easier drive on / drive off for cars and larger trucks.



SCAN TO VIEW  
PRODUCT VIDEO

### SIMPLE, INTUITIVE CONSOLE CONTROLS

Easy to use lift controls feature up, down, and lower to lock operation. The control console includes a filter, regulator, and lubricator to maximize the life of the rolling jacks.

### OPTIONAL HOSE EXTENSION KIT

Customize the location of the control console further from the lift with this optional kit.



  
XA12N000

7

### ROBUST HYDRAULIC SYSTEM

Simple, reliable master/slave hydraulic system maintains level platforms during entire lifting cycle.

### MECHANICAL LOCKS

14 locking positions automatically engage and pneumatically release, ensuring a comfortable working height and maximum security when lift is in raised positions.



Available as **RECESSED**  
or **SURFACE MOUNT** models

### OPTIONAL SHIM KIT

Adjust lift for uneven floors during installation

### XA12 MODEL SPECIFICATIONS

	SURFACE MOUNT	XA12N000
	RECESSED MOUNT	XA12N010
Lift Capacity		12,000 lbs.
Maximum Rise*		73 5/8" / surface mount 62 1/2" / recessed mount
Lowered Height		11 1/8" / surface mount
Maximum Wheelbase		183 1/2" / general service
Max. 2 Wheel Alignment Wheelbase		166"
Min. 4 Wheel Alignment Wheelbase		78"
Max. 4 Wheel Alignment Wheelbase		164"
Overall Length		22' 3" with ramps
Overall Width		7' 5 1/2"
Length of Runway		201" with extensions
Runway Width		24 1/2"
Width between Runways		40 1/8"
Motor / Voltage		1 PH / 230V
Time of Full Rise		61 seconds
Time of Descent		49 seconds
Air Supply		85 - 110 psi
Recommended Bay Size		14' x 24'

\*Rise measures floor to top of runway deck at full stroke.  
Lift colors are red. Control console is gray.

# WHEEL ALIGNMENT SYSTEMS



## NO MINIMUM BAY SIZE REQUIRED!

Rotary's portable aligner consoles can be positioned anywhere in the bay for the ultimate convenience. Maximize available workspace without the worry of obstacles or obstructions!

## NO TOWERS NEEDED WITH THESE PORTABLE CONSOLE SYSTEMS

Rotary's mobile TOWER-FREE alignment systems are easy-to-use, super accurate and do not require a dedicated bay.



Rotary wheel alignment systems offer cutting-edge technology, productivity and safety features that every shop is looking for. Rotary's alignment lifts are compatible with all available Rotary and most available wheel alignment systems giving your shop more flexible options for repairs and bay setup.

**Click on [RotaryWheelService.com](http://RotaryWheelService.com) to learn more about our wheel service equipment.**



Rotary is the world leader in service bay solutions offering a broad range of equipment and accessories to make any service bay safer and more productive.

For a complete guide to our product offering or to contact your local distributor, visit us at [www.rotarylif.com](http://www.rotarylif.com) today.

If you need assistance or have questions, we're here to help

800.445.5438 / Sales: [insidesales@vsgdover.com](mailto:insidesales@vsgdover.com) / Support: [technicalsupport@rotarylif.com](mailto:technicalsupport@rotarylif.com)



## ROTARY

2700 Lanier Drive  
Madison, IN 47250, U.S.A.

Lit# Rotary XA12 Cutsheet.2022.09

©2022 VEHICLE SERVICE GROUP™  
All Rights Reserved. Unless otherwise indicated, ROTARY, VEHICLE SERVICE GROUP™, DOVER and all other trademarks are property of Dover Corporation and its affiliates. Printed in U.S.A.

Product specifications, part numbers, images and component descriptions are subject to change without notice or liability.